
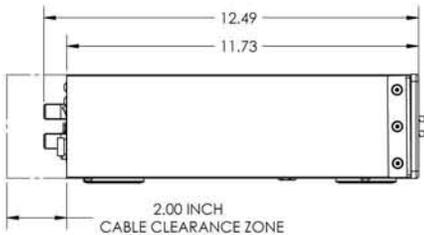


SC-1250 Amplifier

SubContractor® Series

REFERENCE QUALITY CUSTOM INSTALLATION SUBWOOFERS

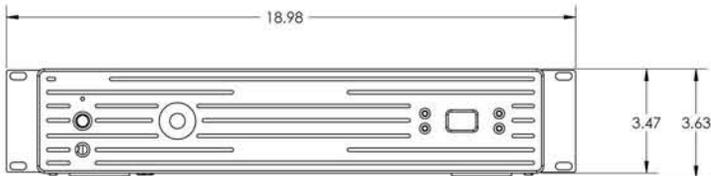

Features

- Incredibly easy to install and configure
- 1250 watt RMS (3,000 watt peak) amplifier power
- Reliable Class D Energy Recovery System (ERS) switching design (Patented)
- System friendly features: 12V trigger, IR repeater jack, RS-232 controllable (Crestron Certified)
- Easily configured for up to TWO subwoofers
- Comes complete with remote, microphone, and rack mount hardware
- Thermal protection circuitry

SPECIFICATIONS

| Model | SC-1250 Subwoofer Amplifier |
|---|---|
| Amplifier Class D | 3000 watts Dynamic 1250 watts RMS Power |
| High Pass Crossover | 80 Hz (6 dB/octave) |
| Low Pass Crossover | 30 Hz-160 Hz, Defeatable, 24 dB/octave slope |
| Inputs | Line and Speaker Level |
| Outputs | Line-level, 80 Hz up, speaker level for up to two subwoofers |
| Phase | 0°, 90°, 180°, 270° |
| Dimensions (H/W/D) (includes feet & knobs) | 3.6" x 17" x 12.5" (9 x 43.2 x 31.8 cm) |
| | **Allow two extra inches in depth for wire connectors and detachable power cable. |
| | **Includes feet. Feet can be removed for rack mount use. Unit is approximately "two rack units" high. |
| Warranty (parts/labor) (North America) | Three years (electronics) Five years (drivers) |
| Shipping Weight (approx.) | 30 lbs. (22.7 Kg) |