
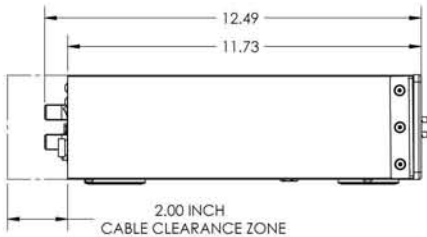


SC-1250 Amplifier

SubContractor® Series

REFERENCE QUALITY CUSTOM INSTALLATION SUBWOOFERS

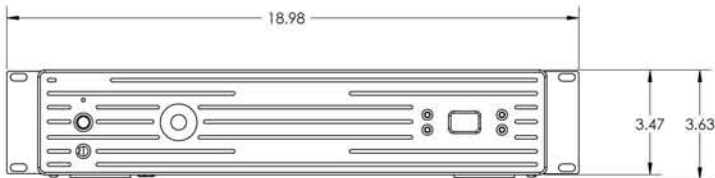

Features

- Incredibly easy to install and configure
- 1250 watt RMS (3,000 watt peak) amplifier power
- Reliable Class D Energy Recovery System (ERS) switching design (Patented)
- System friendly features: 12V trigger, IR repeater jack, RS-232 controllable (Crestron Certified)
- Easily configured for up to TWO subwoofers
- Comes complete with remote, microphone, and rack mount hardware
- Thermal protection circuitry

S P E C I F I C A T I O N S

Model	SC-1250 Subwoofer Amplifier
Amplifier Class D	3000 watts Dynamic 1250 watts RMS Power
High Pass Crossover	80 Hz (6 dB/octave)
Low Pass Crossover	30 Hz-160 Hz, Defeatable, 24 dB/octave slope
Inputs	Line and Speaker Level
Outputs	Line-level, 80 Hz up, speaker level for up to two subwoofers
Phase	0°, 90°, 180°, 270°
Dimensions (H/W/D) (includes feet & knobs)	3.6" x 17" x 12.5" (9 x 43.2 x 31.8 cm)
	**Allow two extra inches in depth for wire connectors and detachable power cable.
	**Includes feet. Feet can be removed for rack mount use. Unit is approximately "two rack units" high.
Warranty (parts/labor) (North America)	Three years (electronics) Five years (drivers)
Shipping Weight (approx.)	30 lbs. (22.7 Kg)